


AquaChekTM

POND TEST STRIPS

AquaChekTM Ammonia tests for Total Ammonia in your pond. The test pad on the strip will change color to indicate the Total Ammonia level in your pond.

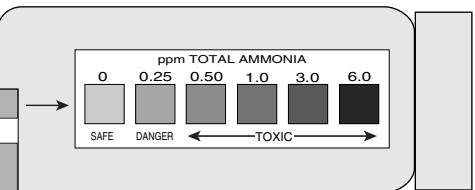


Remember to replace the lid on your AquaChekTM bottle after removing a strip to prevent spilling strips and to keep them fresh. **Keep the strips in a cool, dry place**, and leave the packet of drying agent in the bottle — it will help keep the test strips at their best.

Follow these easy, step-by-step instructions


Step 1

Remove an AquaChekTM Ammonia Pond Test Strip from the bottle and replace the cap tightly. Fill the sample vial to top line with pond water. Dip the test strip into water sample. Move strip vigorously up and down in the water sample for 30 seconds. Make sure both pads are always submerged.



Step 2

Remove test strip and shake off excess water. Hold strip level (pad side up) for 30 seconds.




30 Seconds

Step 4

Rinse sample vial and store for next use. Do not place vial inside bottle of test strips.

For recommendations on the importance of maintaining proper water conditions, see Basic Pond Chemistry on the reverse side of this instruction sheet.

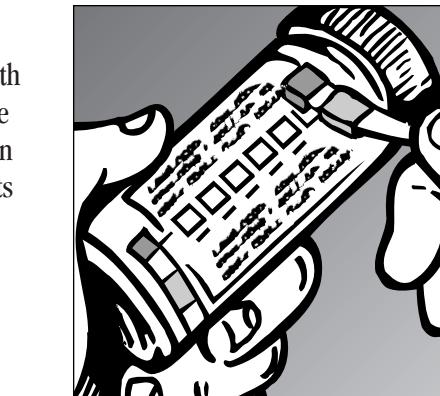

Step 3

To read results, **turn strip over** so that both pads are facing away from you. Compare the color of the **small pad** to the color chart on the label. Be sure you are reading the results through the clear plastic of the strip.

To keep your pond clean and healthy, pond water should be tested before introducing fish and regularly monitored throughout the year. Test every week from the beginning of May to the end of September and periodically during the winter. It's also a good idea to write down your results each time you test.

Note: After performing test, avoid contact with skin of activated test pad and sample solution. Dispose of used strip and sample solution promptly.

