

# OWNER'S MANUAL

## CP-2020 POOL/SPA CONTROL SYSTEM

### IMPORTANT SAFETY INSTRUCTIONS

Basic safety precautions should always be followed when operating and servicing this electrical equipment, and when using the spa.

#### **READ AND FOLLOW ALL INSTRUCTIONS.**

#### **Prolonged immersion in hot water may induce hyperthermia.**

Hyperthermia occurs when the internal temperature of the body reaches a level several degrees above the normal body temperature of 98.6° F.

The symptoms of hyperthermia include dizziness, fainting, drowsiness, lethargy, and an increase in the internal temperature of the body.

The effects of hyperthermia include: 1) unawareness of impending hazard; 2) failure to perceive heat; 3) failure to recognize the need to exit the spa; 4) physical inability to exit the spa; 5) fetal damage in pregnant women; and 6) unconsciousness, resulting in a danger of drowning.

**WARNING: The use of alcohol, drugs or medication can greatly increase the risk of fatal hyperthermia in hot tubs and spas.**

The water in a spa or hot tub should never exceed 104° F.

Water temperatures between 100° F. and 104° F. are considered safe for a healthy adult. Lower temperatures are recommended for extended use (exceeding 15 minutes) and for young children.

Before entering the spa, the user should always check the water temperature with an accurate thermometer.

Since excessive water temperatures have a high potential for fetal damage during the early months of pregnancy, pregnant or possibly-pregnant women should limit spa water temperatures to 100° F.

The use of alcohol, drugs, or medication before or during spa use may lead to unconsciousness with the possibility of drowning.

Persons suffering from obesity or with a medical history of heart disease, low or high blood pressure, circulatory system problems, or diabetes should consult a physician before using the spa.

Persons using medication should also consult a physician before using the spa, since some medications may induce drowsiness or affect heart rate, blood pressure or circulation.

Before using this electrical equipment, obtain a copy of the Installation Instructions and a completed EQUIPMENT CHECKLIST from the Pool Builder, Electrician, or Start-up Person.

#### **SAVE THESE INSTRUCTIONS**



## ONE YEAR LIMITED WARRANTY

Compool Corporation warrants to the purchaser of this electronic control system, for the period of one year from the date of original purchase for use, that any defective product proved to be caused by faulty workmanship or faulty material, will be repaired or replaced at Compool's option for no charge, providing the product is returned to Compool with all transportation charges prepaid.

This warranty covers the **CP-2020 Controller**, **LX-2020 Power Center**, optional **VOR-24 Valve Operators**, and optional **Remote Controls** including all components and parts. It does not include freeze sensors, light bulbs, batteries, or labor for calibration. It extends to the first retail purchaser and any subsequent owners of the system.

This limited warranty applies only to controls which have been installed and maintained in strict accordance with installation and operating instructions provided by Compool Corporation, using installation hardware supplied and/or recommended in writing by Compool, and to controls which have been connected to the correct supply voltage.

This limited warranty does not apply to any controls which have been repaired or altered by anyone other than Compool or a person authorized by it; or which have been subject to misuse, neglect or accident; or which have been damaged by wind, rain, lightning, freezing or other cause, thing, person, or act of God; or which have been subject to damage in transit, during installation, or by someone other than Compool Corporation; or which have been damaged because of a defect in a component or part which is not part of the Compool Control System; or upon which the serial number or manufacture date has been altered, effaced or removed.

This warranty gives you specific legal rights and you may also have other rights which vary from state to state. Compool Corporation does not authorize any person to create any other obligation or liability in connection with Compool controls. Compool Corporation makes no warranty of merchantability or fitness for any use. Any implied warranty applicable to Compool controls is limited in duration to the duration of this written warranty.

Unless state law provides otherwise, Compool Corporation shall not be liable for consequential or incidental damages resulting from breach of this written warranty or any implied warranty, or for any inconvenience, loss of time, or incidental expenses such as telephone calls.

Compool Corporation shall not be liable for any labor charges associated with the removal or reinstallation of any so-claimed defective products.

For information on possible Authorized Service Centers within your vicinity, call Compool Corporation at (415) 964-2201 or outside California at (800) 458-2201.

To exercise this warranty, send defective unit, with copy of dated receipt and a brief description of the problems encountered, postage prepaid, to:

**COMPOOL CORPORATION**  
**599 Fairchild Drive, Mountain View, California 94043**

## INTRODUCTION

The **CP-2020** is an electronic control system which is designed to coordinate and operate all of the equipment associated with your swimming pool and spa.

The system is comprised of two principal components; the **CP-2020 CONTROLLER**, which is located inside your house, and the **LX-2020 POWER CENTER** which is located at the pool equipment pad.

The Controller automatically controls and monitors the timing of all your pool equipment, and the temperature of your pool and spa, while the Power Center provides easy equipment maintenance for your Pool Serviceperson.

Additionally, the **CP-2020** incorporates important safety features which protect your pool equipment from accidental damage. (see below).

Your system may also include additional Remote Controls and special options which further add to the convenience, safety, and economy of operating your swimming pool equipment.

## SAFETY FEATURES

### HEATER PROTECTION:

Built-in electronic delay circuits automatically run the pool and spa filter pumps for an additional four minutes whenever the system is turned off. This feature enables each heater to cool down, so that the heat exchanger and plumbing are not damaged from overheating.

**For testing and servicing purposes, it is possible to override these delay circuits by pushing the DELAY CANCEL Button at the CP-2020 Controller.**

### POOL CLEANER PROTECTION:

If your system incorporates a pool cleaner pump, it will have been plumbed downstream of the filter pump.

This arrangement requires that the filter pump be running whenever the pool cleaner is on.

The CP-2020 incorporates the following protection features against possible pump damage if there is no water circulation:

1. The pool filter pump will automatically be activated whenever the pool cleaner is running, even if the filter has not been switched on.
2. Additionally, whenever the pool cleaner is turned on, a built-in electronic delay circuit will prevent it from running until 4 minutes have passed. This prevents the pump from possible damage caused by air which may have entered the plumbing since the system was last used.


**For testing and servicing purposes, it is possible to override this delay circuit by pushing the DELAY CANCEL Button at the CP-2020 Controller.**

### BATTERY BACK-UP:

In case of power failure, a long-life battery automatically maintains the program and clock functions of your Control System. This safeguards against the equipment operating erratically, once power has been restored, and also eliminates the need to reprogram whenever there is a power failure.

# CONTROLLER

Installed in a convenient location inside your house, the CP-2020 CONTROLLER gives you fingertip control of all the pool and spa equipment.

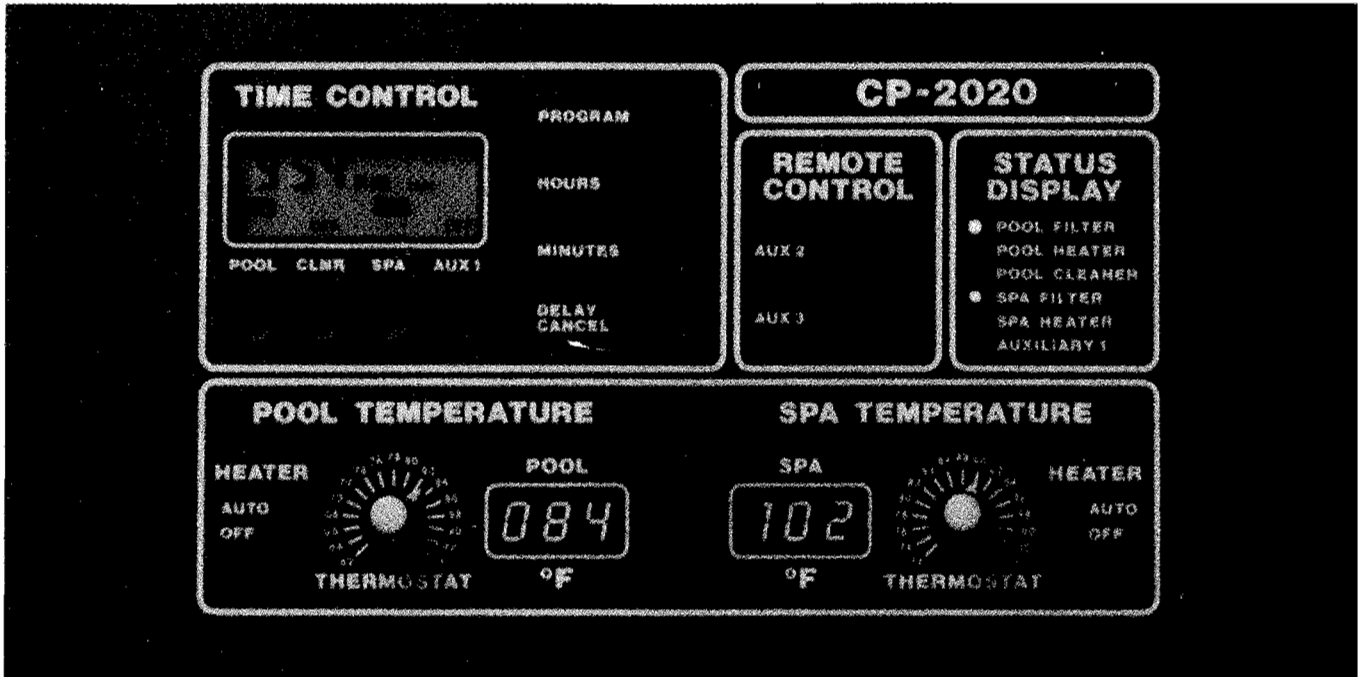

## TIME CONTROL:

The Controller houses a 24 hour Clock with a digital display, which is used to program daily pool filtration, pool cleaning, spa filtration and an auxiliary function (such as lights).

There are four **Equipment Buttons** which are used for switching the pool equipment ON or OFF:

1. **POOL Button:** Activates pool filter pump, and circulates water through the pool equipment.  
Enables pool to be heated.
2. **CLNR Button:** Activates pool cleaner (after 4 minute delay), and also pool filter pump if **POOL Button** is not already switched on.
3. **SPA Button:** Activates spa filter pump, and circulates water through the spa equipment.  
Enables spa to be heated.
4. **AUX 1 Button:** Optional. Activates auxiliary equipment (such as spa light).

The **PROGRAM**, **HOURS** and **MINUTES Buttons** are used for setting the Clock, and for programming the daily operation of the pool equipment. **See Page 6.**

The **DELAY CANCEL Button** is used to override the "Pool Filter Pump Off Delay", "Spa Filter Pump Off Delay" or "Pool Cleaner On Delay" circuits (for testing and servicing purposes only).

## REMOTE CONTROL:

Additional remote circuits may have been added to your system to control more auxiliary equipment (such as pool light, air blower, jet pump, waterfall, etc.).

**Note:** These functions are not controlled by the Programmable Clock.

## STATUS DISPLAY:

**Status Lights** are provided for the various pieces of equipment controlled by the CP-2020.

The presence of a light indicates that the equipment has been activated. The absence of a light indicates that the equipment is turned off.

## TEMPERATURE CONTROL:

Separate electronic controls are provided for **POOL TEMPERATURE** and **SPA TEMPERATURE**.

Each control incorporates the following:

### HEATER Switch:

**AUTO Position:** Enables heating to the preset temperature whenever the filter pump is running.  
Switch should be left in this position for normal operation.

**OFF Position:** Overrides THERMOSTAT and allows no heating.

### THERMOSTAT Dial:

Used to preset your desired water temperature.

As long as the **HEATER Switch** is in the "AUTO" position and the filter pump is running, the water will heat up to this preset temperature.

### Temperature Display:

Whenever the filter pump is running, the precise water temperature will be displayed in degrees Fahrenheit.

**Note:** Filter pump must be running in order to provide accurate temperature display.

## TIME CONTROL

### TIME MODE:

In **Time Mode** (normal operation), the Clock will display the actual time of day, and "**TIME**" will appear on the right of the Display.

It is possible to manually activate the pool equipment while Clock is in **Time Mode**, by simply pushing the appropriate **Equipment Button**. This will temporarily override any preset program which may be in effect.

### PROGRAM MODE:

In order to preselect daily filtration cycles, pool cleaning and an auxiliary function (such as pool light), the Clock must be switched to **Program Mode**.

To achieve this, push **PROGRAM Button** once. Whenever Clock is in **Program Mode**, "**PROG**" will appear on the right of the Display.

**After programming is complete, the Clock will automatically return to Time Mode.**

## SETTING THE CLOCK

If the Clock is not already in **Time Mode**, push **PROGRAM Button** until "**TIME**" appears on the right of the Display. This indicates that the Clock is now in **Time Mode**.

Push the **HOURS** and **MINUTES Buttons** until the correct time of day is displayed.

**Pay special attention to the AM/PM indicator.**



## PROGRAMMING

It is possible to preset six programs during a 24 hour period.

Each of the six programs can be used for turning equipment ON or OFF.

More than one piece of equipment can be turned ON or OFF at each program. However, to turn the same piece of equipment ON and OFF requires two programs. It is therefore advisable to overlap programs.

Once the programming is complete, the pool and spa equipment will operate at the same times every day.

**Before commencing programming, it is advisable to determine at what time you would like the equipment to turn on, and for how long you would like each piece of equipment to run.**

To better understand the programming sequence, let's follow a sample program, step by step.

In our example, we would like to activate the following equipment:

**Filter the pool from 9:00 am until 3:30 pm.**

**Turn the pool cleaner on from 12:00 pm until 3:30 pm.**

**Turn the spa on from 7:00 pm until 10:00 pm.**

**Turn auxiliary 1 (spa light) on from 8:00 pm to 10:00 pm.**

To begin programming, push **PROGRAM BUTTON** once.

"**PROG 1**" will appear on the right of the Display. This indicates that the Clock is in **Program Mode**, and that the first program is ready to be entered.

Enter the first program time (9:00 am in our example) by pushing the **HOURS** and **MINUTES** Buttons.

In **Program Mode**, minutes are advanced in ten minute increments.

Push **POOL Equipment Button**.

"**ON**" should appear directly above **POOL Button**.

If "**ON**" is displayed above any of the other **EQUIPMENT Buttons**, push appropriate Button once, and "**OFF**" will appear.

You have now completed the first program.

in order to lock-in the program, simply push the **PROGRAM Button** once.



"**PROG 2**" will now appear on the right of the Display. This indicates that the second program is ready to be entered.

Enter the second program time (12:00 pm) by pushing the **HOURS** and **MINUTES** Buttons.

Pay special attention to the **AM/PM** indicator.

Push **CLNR Equipment Button**.

"**ON**" should appear directly above **CLNR Button**.

In our example, at 12:00 pm the pool filter pump should still be running. However, it will not be necessary to push the **POOL Equipment Button**, because the built-in protection circuit automatically activates the filter pump whenever the pool cleaner is on.

Make sure that "**OFF**" is still displayed above **SPA** and **AUX1 Equipment Buttons**.

Push **PROGRAM Button** to lock-in the program.




"**PROG 3**" will now appear on the right of the Display. This indicates that the third program is ready to be entered. Enter the third program time (3:30 pm) by pushing the **HOURS** and **MINUTES** Buttons.

In our example, at 3:30 pm the pool filter pump and pool cleaner should turn off.

Make sure that "**OFF**" is displayed above each **Equipment Button**.

Push **PROGRAM** Button to lock-in the program.

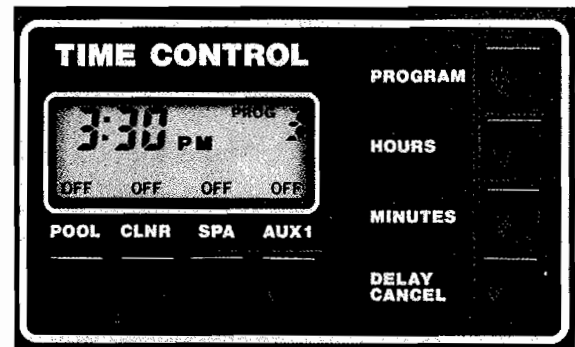

"**PROG 4**" will now appear on the right of the Display. This indicates that the fourth program is ready to be entered.


Enter the fourth program time (7:00 pm) by pushing the **HOURS** and **MINUTES** Buttons.

Push **SPA Equipment Button**.

"**ON**" should appear directly above SPA Button.

If "**ON**" is displayed above any of the other **Equipment Buttons**, push appropriate Button once, and "**OFF**" will appear.

Push **PROGRAM** Button to lock-in the program.

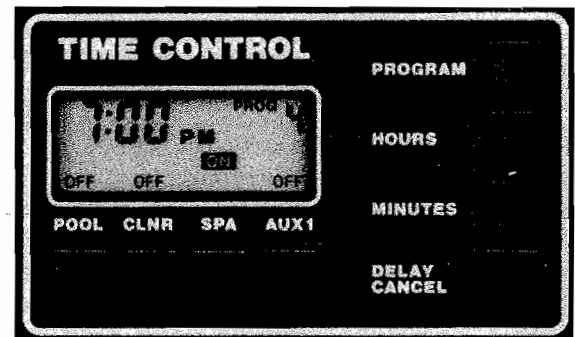

"**PROG 5**" will now appear on the right of the Display. This indicates that the fifth program is ready to be entered.

Enter the fifth program time (8:00 pm) by pushing the **HOURS** and **MINUTES** Buttons.


In our example, we would like to turn on the spa light (AUX 1) at 8:00 pm, but the spa should also still be on.

Therefore, push **SPA** and **AUX 1 Equipment Buttons**.

"**ON**" will appear above each Button.

This is an example of overlapping programs.

Push **PROGRAM** Button to lock in the program.

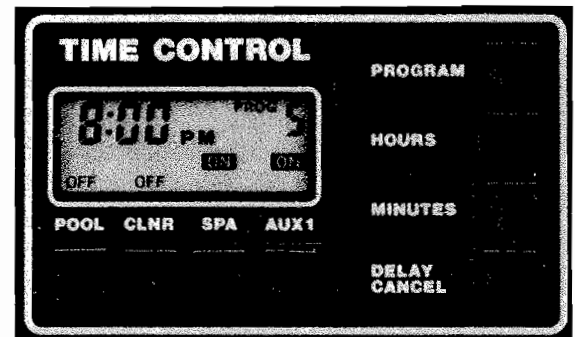

"**PROG 6**" will now appear on the right of the Display. This indicates that the sixth program is ready to be entered.


Enter the sixth program time (10:00 pm) by pushing the **HOURS** and **MINUTES** Buttons.

In our example, all of the equipment should be turned off at 10:00 pm.

Therefore, make sure that "**OFF**" is displayed above all of the **Equipment Buttons**.

To lock-in the program and return Clock to **Time Mode**, simply push the **PROGRAM** Button once.

If this is forgotten, the Clock will automatically return to **Time Mode** after two minutes.

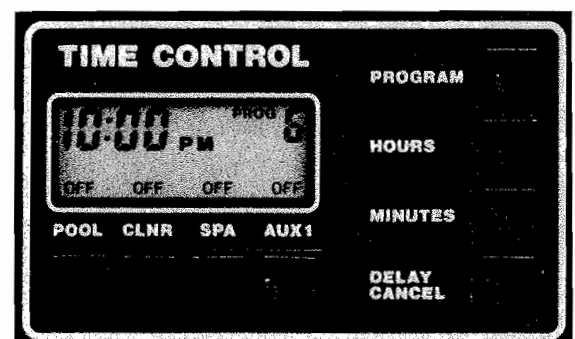



### UNUSED PROGRAMS:

Our sample program utilizes all six programs. However your personal program may only require that you use three or four of the available programs. In this event, we recommend that you disable all unused programs.

To accomplish this, push **PROGRAM Button** until unused program is displayed.

Push and hold down **HOURS** and **MINUTES Buttons** at the same time, and then release simultaneously.

"OFF" will appear on the Display.

To reactivate any disabled program, simply push **HOURS Button** once. "OFF" will disappear, and the Clock can then be programmed.



### REVIEWING PROGRAM:

After programming is complete, it is possible to rapidly advance the Clock through a 24 hour period in order to review your program.

Make sure that Clock is in **Time Mode**.

Push and hold down **HOURS** and **MINUTES Buttons** at the same time, and then release simultaneously.

The Clock will rapidly advance through your program, step by step, and the appropriate **STATUS DISPLAY Lights** will turn ON and OFF as each program is activated.

When the review is complete, the Clock will automatically return to the correct time of day and will also return all equipment to its previous status.

### DELAY CANCEL:

For testing and trouble-shooting purposes, occasionally it may be necessary to temporarily override the built-in "Filter Pump Off Delays" or "Pool Cleaner On Delay" circuits.

To do this, simply push the **DELAY CANCEL Button**.

The Delay will automatically reoccur the next time the pool cleaner turns on or the pool or spa filter pump turns off.

## CUSTOM CLOCK OPTIONS

The standard CP-2020 Controller is provided with six programs plus the appropriate equipment interlock and safety delays.

Your Pool Builder may, however, have incorporated one or more of the following custom features:

### PROGRAM LOCK:

To safeguard against someone accidentally pushing the **PROGRAM Button** and inadvertently tampering with your daily program, your Pool Builder may have included a Program Lock feature.

In this instance, you will need to push the **PROGRAM Button** quickly twice in order to put the Clock into **Program Mode**.

### SINGLE OCCURRENCE PROGRAM:

Occasionally, you may wish to use your spa at a time which is different from your normal daily program.

In this instance, it is possible to enter a "**once only**" program step which will occur within the following 24 hour period without having to reprogram the daily equipment sequence.

The "once only" program will automatically be canceled once the clock reaches its next program step.

Push **PROGRAM Button** to put Clock into **Program Mode**.

"**PROG**" will appear on the right of the Display.

Continue to push **PROGRAM Button** until a flashing "**ONCE**" appears.

Enter the time that you wish to activate the spa (11:00 pm in our example) by pushing **HOURS** and **MINUTES Buttons**.

Push **SPA Equipment Button**.

"**ON**" will appear directly above **SPA Button**.

Push **PROGRAM Button** to lock-in program.

**Remember to manually turn off the spa after use, otherwise it may run all night until the Clock reaches its next program step.**



### COUNTDOWN TIMER:

This feature enables you to preset the operating time of any piece of equipment. Whenever that equipment is turned on, it will run for a predetermined length of time and then automatically switch off.

The countdown duration can range from a minimum of 10 minutes to a maximum of 11 hours and 50 minutes (in ten minute increments).

To better understand this feature, let us look at a typical application:

For example, we would like to utilize an optional Remote Control to switch AUX 1 (spa jet pump), and we would like the jets to run for a period of 30 minutes whenever they are activated.

Push **PROGRAM Button** to put Clock into **Program Mode**.

"**PROG**" will appear on the right of the Display.


Continue to push **PROGRAM Button** until a flashing "**TIMER**" appears.

Enter the desired countdown duration (30 minutes in our example) by pushing the **HOURS** and **MINUTES Buttons**.

Push appropriate **Equipment Button (AUX 1 in our example)**.

"**ON**" will appear directly above **Equipment Button**.

Push **PROGRAM Button** to lock-in the program.

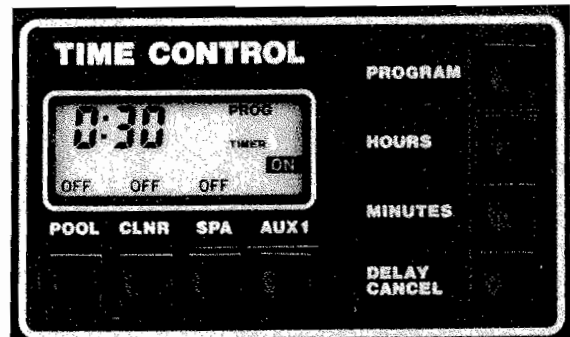

### ADDITIONAL AUXILIARY CONTROL:

If your Control System does not utilize a pool cleaner, your Pool Builder may have overridden the built-in Pool Cleaner Protection Circuits, so that the **CLNR Equipment Button** can be used to activate an additional auxiliary function (such as landscape lighting).


In this instance, the equipment will turn on immediately (no 4 minute ON delay), and the pool filter pump will not be simultaneously activated.



### EIGHT PROGRAMS:


If the standard six programs are insufficient for your particular programming requirements, it is possible to modify the Clock so that eight programs may be entered.

Consult the Installation Manual.

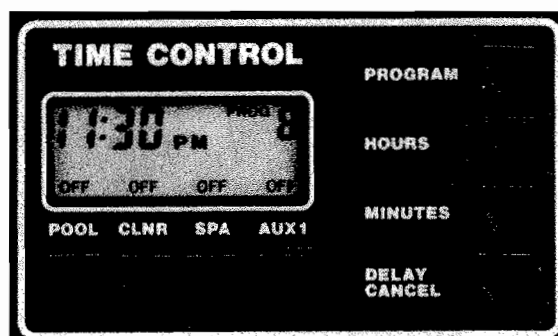

## POWER CENTER

Located in close proximity to your pool and spa equipment, the **LX-2020 POWER CENTER** provides your Pool Serviceperson with manual control of the system without having to gain access to the CP-2020 Controller.

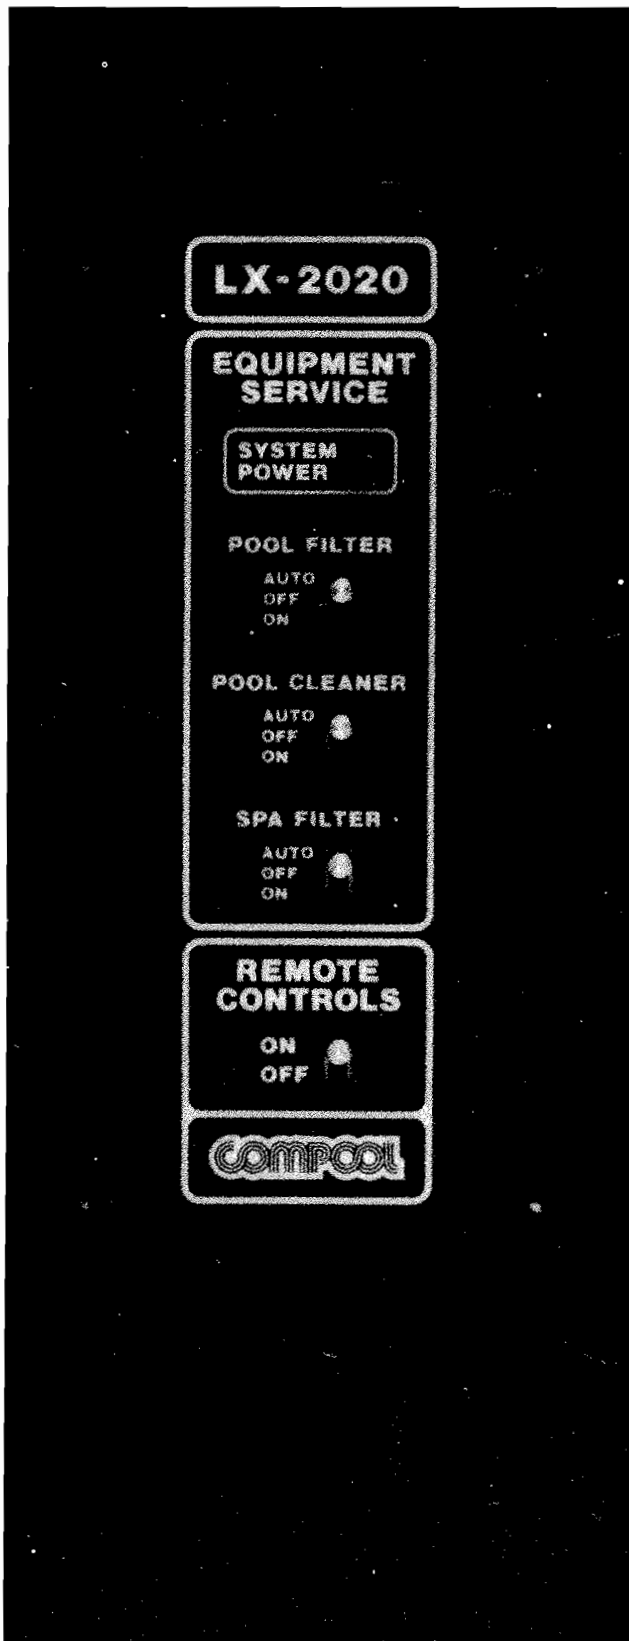

### EQUIPMENT SERVICE:

**SYSTEM POWER** Light indicates that power has been connected to the system.

If this light is not on, consult your Pool Serviceperson.

**POOL FILTER, POOL CLEANER, and SPA FILTER Switches** should be kept in the "AUTO " position for normal system operation.

The "OFF" and "ON" positions will disable the CP-2020 Controller and provide manual-override capability for service purposes.

Note: If two-speed filter pumps are being used, the "ON" position will automatically activate the pump in high speed.

**Always return Switches to the "AUTO" position after the equipment has been serviced.**

### REMOTE CONTROLS:

This switch should be kept in the "ON" position for normal system operation.


The "OFF" position will disable any Remote Controls which may have been added to your system. This feature is particularly convenient if your system includes a Spa-side Remote Control, and you wish to prevent the unauthorized use of your spa while you are away from home.

## REMOTE CONTROLS

### SPA-SIDE REMOTE:


One or more 3-function waterproof Remote Controls (called **SUPERSWITCH**) may be located at your spa. This will enable you to override the CP-2020 Controller, and activate your spa equipment from the convenience of the spa. It is possible to control the following equipment from the Superswitch:

1. **SPA.** Activates spa filter pump and enables spa heater.  
(Overrides SPA Equipment Button at CP-2020).
2. **HEAT BOOST.** Overrides the spa thermostat, and activates the spa heater for a 5 minute period.  
If the filter pump is not running, this button will be inactive.
3. **AUX 1.** Activates auxiliary equipment such as spa light.  
(Overrides AUX 1 Equipment Button at CP-2020).
4. **AUX 2.** Activates auxiliary equipment such as jet pump.  
(Overrides AUX 2 Equipment Button at CP-2020).
5. **AUX 3.** Activates auxiliary equipment such as air blower.  
(Overrides AUX 3 Equipment Button at CP-2020).
6. **AUX 4.** Activates auxiliary equipment such as pool light.  
AUX 4 cannot be controlled from the CP-2020, and requires the addition of an optional Expansion Module (model MOD-BOOST).
7. **AUX 5.** Activates auxiliary equipment such as landscape lights.  
This feature is only possible if a pool cleaner valve is used, and there is no two-speed filter pump or electric heater being used. It also requires that the optional Expansion Module (model MOD-BOOST) is installed.

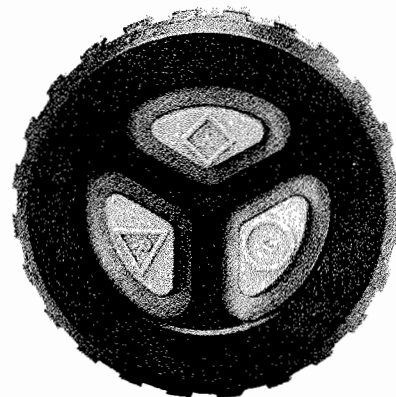


### INDOOR REMOTES:

Your system may include a three-function indoor Remote Control (**model LVS-3**), which enables you to control the pool and spa equipment from a convenient indoor location.

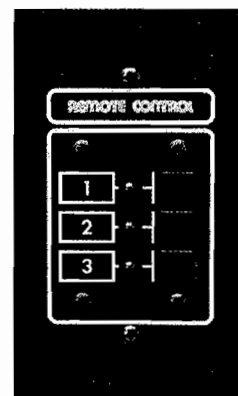

A three-function Indoor Remote with Digital Temperature Display (**model LVS-3TR**) is also available.


This additionally enables you to monitor your spa temperature from the convenience of your home.

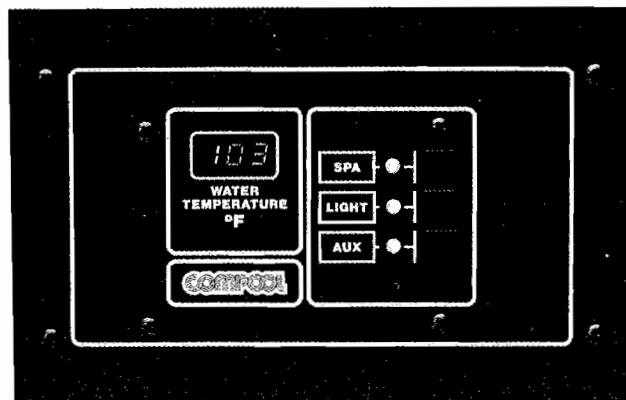

## SYSTEM OPTIONS

### VALVE OPERATORS:

Your control system may include one or more motorized valves (**model VOR-24**) for a custom hydraulic application, such as a fountain, waterfall, automatic spa cleaner, or (in lieu of a booster pump) for your pool cleaner.

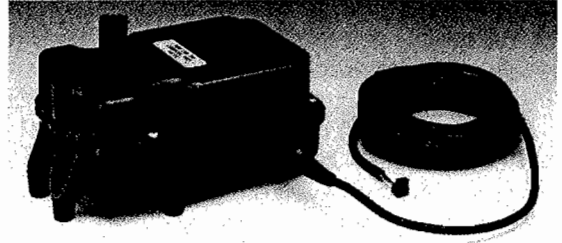

### TWO SPEED PUMP CONTROLS:

If your pool or spa incorporates a two speed filter pump, the CP-2020 has been designed to provide you with the maximum energy-efficient usage of this feature.

Although your Pool Builder may have adjusted the two speed control circuitry to your specific requirements, the CP-2020 will typically run the filter pump at low speed during normal operation, but automatically switch the pump to high speed under any of the following conditions:

1. **For four minutes when the filter pump is first turned on.** This feature establishes proper flow through the system, and packs the filter grids. After four minutes, the pump will automatically switch to low speed.
2. **Whenever the pool cleaner is running.** This provides sufficient flow for the pool cleaner to operate effectively.
3. **Whenever the heater is on.** This feature will conserve more energy by bringing the water up to the desired temperature more quickly.
4. **For custom applications** (such as for additional jet action during spa use). It is additionally possible to automatically switch the pump to high speed whenever equipment at AUX 1, AUX 2, and/or AUX 3 is operating.

### FREEZE PROTECTION:

Recirculating freeze sensors (**model FPS-C**) may have been added to your control system.

These protect the plumbing and equipment from possible freeze damage by running the pool and spa filter pumps whenever the temperature falls to approximately 41° F.

Similarly, an auxiliary pump freeze sensor (**model FPS-AUX**) may be added to activate auxiliary equipment (such as a jet pump) during potential freezing conditions.

## MAINTENANCE


### SERVICING THE VALVES:

If your system has been plumbed with the Compool Pro Valve, maintenance is a simple operation which can be performed by either yourself or your Pool Serviceperson.

1. Obtain Compool Grease Gun (model GUN-3) from your Pool Equipment Supplier.
2. Ensure that the valve is in the "closed port" position.
3. Inject special Compool Silicone Grease into grease fitting at bottom of valves.  
Use approximately eight squeezes on grease gun trigger after grease begins to flow.  
**For best results, squeeze slowly, and wait a few seconds between squeezes.**
4. Wait approximately 15 minutes before attempting to rotate valve.
5. It is advisable to repeat this procedure every four months, or sooner if your pool is exposed to an extraordinarily high amount of sand or dirt.

**CAUTION: Use only approved silicone grease.**  
**Petroleum-based lubricants will damage valves.**

**NOTE:** Replacement parts, grease gun, and silicone grease refill cartridges are available from your Pool Equipment Supplier or direct from Compool.

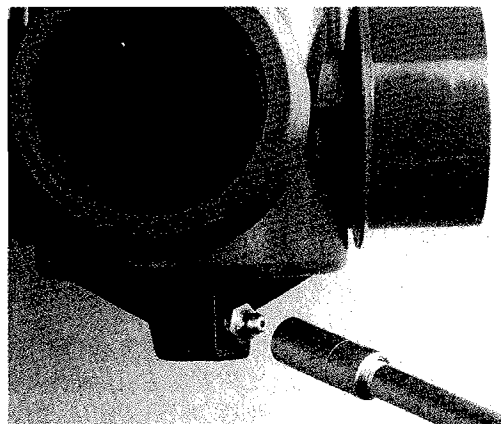

If your system has not been plumbed with the Compool Pro Valve, check with the manufacturer's service instructions. It may be necessary to remove the Valve Operator and disassemble the valve in order to lubricate the diverter and O-ring seals.

Compool Silicone Grease is also available in a 1 oz. tube for this application.

### REPLACING THE BACK-UP BATTERY:


There is a small 3 volt lithium battery located on the backside of the CP-2020 Controller.

In the absence of power, this battery will keep the clock running and retain the programming in memory for approximately 48 hours. While power is connected to the system, the battery will not be drained. However, it is not rechargeable.

To replace the battery:

1. Remove four mounting screws from CP-2020 Controller (2 at each side).
2. Carefully fold Controller out, still connected to cable.
3. Pry-out old battery from battery clip, and replace it with a new one.  
Pay special attention to the polarity (+ sign).

Replacement battery is available from Compool, or can be purchased at Radio Shack or your local drug store. (Type CR2032, or equivalent).

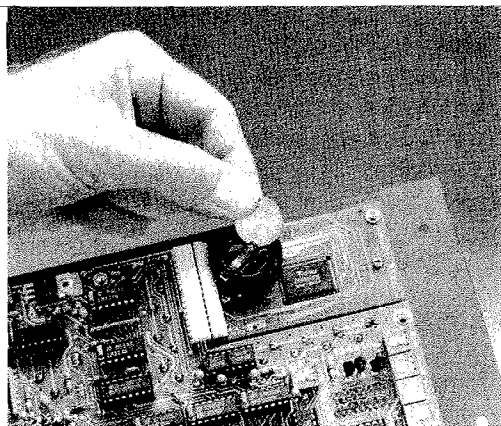

## TROUBLE-SHOOTING

Your control system is designed to provide years of trouble-free pool and spa enjoyment.

However, if at any time your system appears to malfunction, consult the following Check List, which should help to alleviate any problems created by operator error.

If you are still unable to solve your particular symptom, refer the situation to a qualified Pool Service Company.

### **NOTHING OPERATES:**

1. Check all circuit breakers at the electrical supply panel.
2. At the LX-2020, check that **SYSTEM POWER Light** is ON.
3. Check 3 amp circuit breaker, which is located above faceplate in LX-2020 Power Center.  
Tripped circuit breaker is indicated by a white tab. Push to reset.
4. If circuit breaker continues to trip, refer to a qualified Service Company.
5. At the LX-2020, turn **REMOTE CONTROLS Switch** to "OFF" position.  
If the equipment can now be operated, there may be a malfunction at the Spa-side Remote Control.

### **POOL FILTER PUMP DOES NOT OPERATE:**

1. At the CP-2020, push **POOL Equipment Button**, and check that **POOL FILTER Status Light** is ON.
2. At the LX-2020, turn **POOL FILTER Equipment Service Switch** to "ON" position.
3. If pool filter pump operates there is a possible malfunction at the CP-2020.
4. If pool filter pump does not operate, pump may require servicing.

### **POOL CLEANER DOES NOT OPERATE:**

1. At the CP-2020, check that **CLNR** is programmed ON, and that 4 minute delay has expired.
2. At the LX-2020, turn **POOL CLEANER Equipment Service Switch** to "ON" position.
3. If pool cleaner operates, there is a possible malfunction at the CP-2020.
4. If the pool cleaner pump does not operate, pump may require servicing.
5. If system incorporates a pool cleaner valve, check that cable has not been unplugged from Valve Operator.

### **SPA FILTER PUMP DOES NOT OPERATE:**

1. At the CP-2020, push **SPA Equipment Button**, and check that **SPA FILTER Status Light** is ON.
2. At the LX-2020, turn **SPA FILTER Equipment Service Switch** to "ON" position.
3. If spa filter pump operates, there is a possible malfunction at the CP-2020.
4. If the spa filter pump does not operate, pump may require servicing.

### **POOL OR SPA HEATER DOES NOT OPERATE:**

1. At the CP-2020, make sure that appropriate **HEATER Switch** is in "AUTO" position, and that **THERMOSTAT Dial** is set correctly.
2. Check **Temperature Display**. Three dashes, or an unreasonably high temperature indicates that there is a malfunction at the Water Sensor.
3. Check that appropriate filter pump is running.
4. Check the filter pressure. If filter is clogged, the heater may not be getting sufficient water flow.
5. Inside the heater, check pilot light and heater controls. Heater must be turned on, and its own thermostat must be turned all the way up.
6. Heater may require servicing.

### **SPA DOES NOT HEAT UP TO 104° F:**

1. Inside the heater, check that thermostat is turned all the way up.
2. High limit control on heater may need adjusting. Refer to a qualified Service Company.
3. If **SPA HEATER Status Light** at the CP-2020 turns OFF before spa attains the maximum temperature of 104° , the Controller may need a calibration adjustment. Refer to a qualified Service Company.

