

INSTRUCTIONS FOR CROSS-POOL VOLLEY


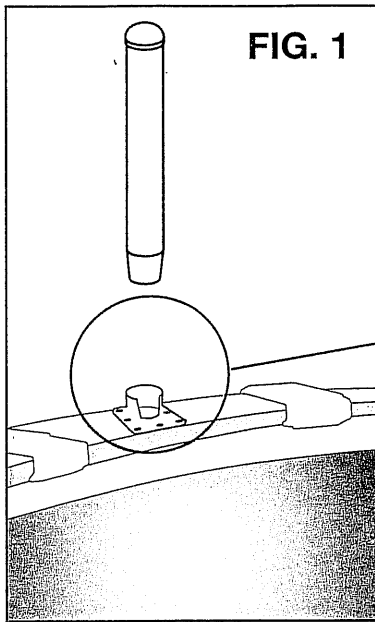


FIG. 1

Detail A

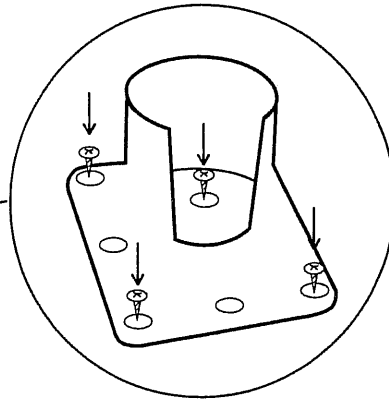

1. Determine position desired for your Volleyball game, upright poles and net. You will need to install (2) sockets on opposing sides of pool, per Fig. 1 & Fig. 3. Secure each socket (see Detail A) to top rail of pool using (5) self-drilling screws provided. Begin installation with center screw. Note: Break-Away opening should face inside of pool.

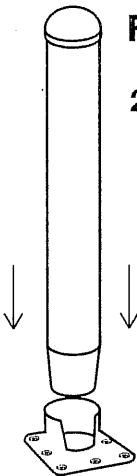


FIG. 2

2. Insert upright poles in socket per Fig. 2. Align ribbing so that pole will not turn.

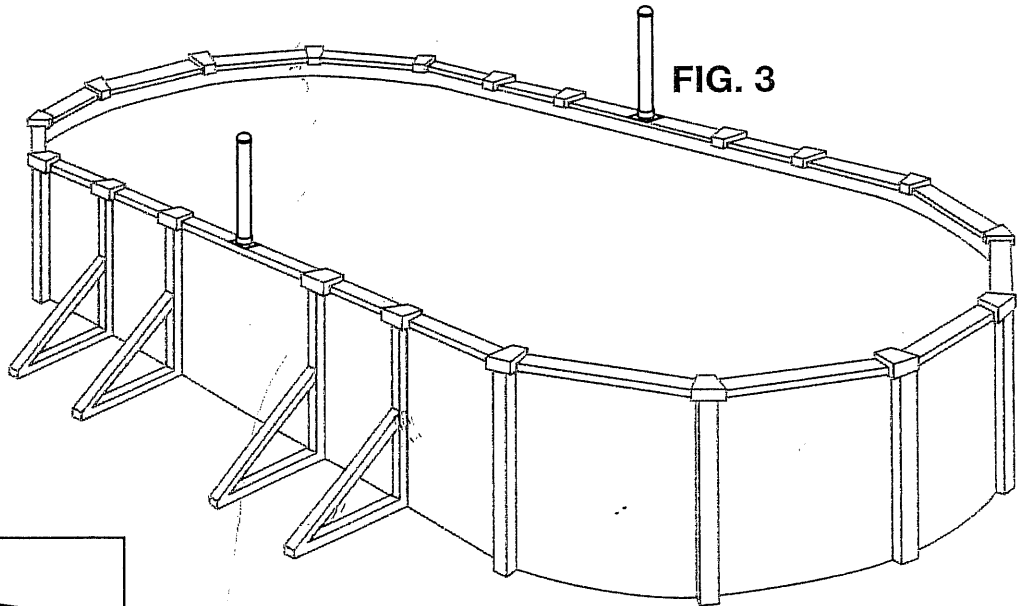


FIG. 3

3. Repeat step 2 on each side of the pool per Fig. 3.



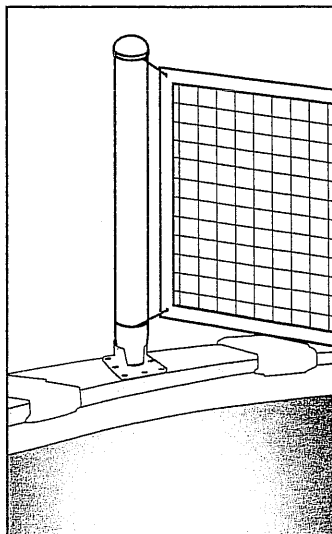


FIG. 4

4. Attach net to pole per Fig. 4 on both sides. Use equal lengths of string on each side of net to center net across pool.

POOLSIDE BASKETBALL ASSEMBLY INSTRUCTIONS

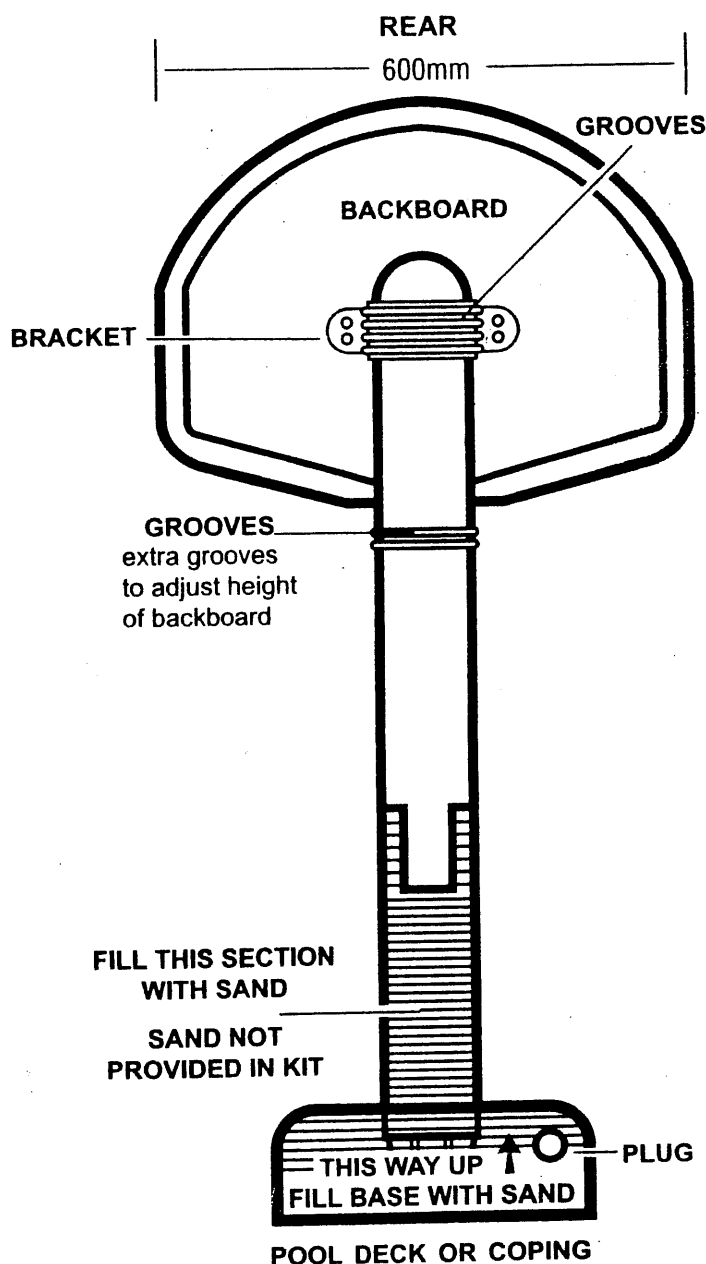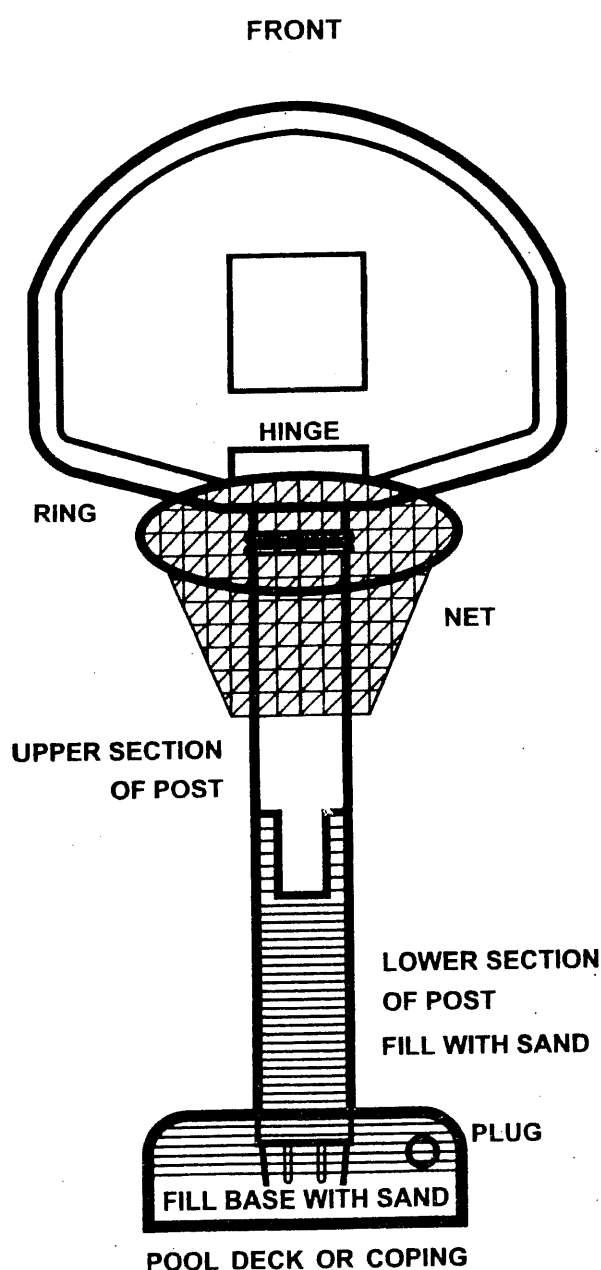

BACKBOARD/RING ASSEMBLY

1. Position bracket over grooved part of post (note : there are both vertical and horizontal grooves) and attach to backboard using nuts and bolts provided.
2. Note there are two sets of grooves on the post so height of backboard can be set at maximum [top grooves], or lower height depending on degree of stability desired, or skill/age of players.
3. Net ring clips onto backboard with attachment lugs and clip-hinge slotting into apertures provided, Bottom lugs go in first, then top clip-hinge is clicked into position using an upward pivot motion. Apparatus is designed so that excessive force [i.e. "slam-dunking"], will dislodge ring, rather than damage hinge.