




FLOATING BASKETBALL

ITEM NO. 9162

ASSEMBLY INSTRUCTIONS

1. Place the three tee couplings onto the bottom hoop sections and connect as illustrated.
2. Slide the net loops onto the upper ring (one pipe section has not been glued into T coupling so that the loops can be slid onto the pipe and then the pipe can be glued permanently in place or you can use one of the set screws provided)
3. Insert upright posts into couplings to connect top and bottom hoops and tighten screws.
4. Insert and tighten all set screws located on bottom hoop. Important note tee connectors are predrilled for set screws- position the screws so they are on the inside of the hoop.
5. Material is PVC plastic and PVC cement may be substituted for set screws.

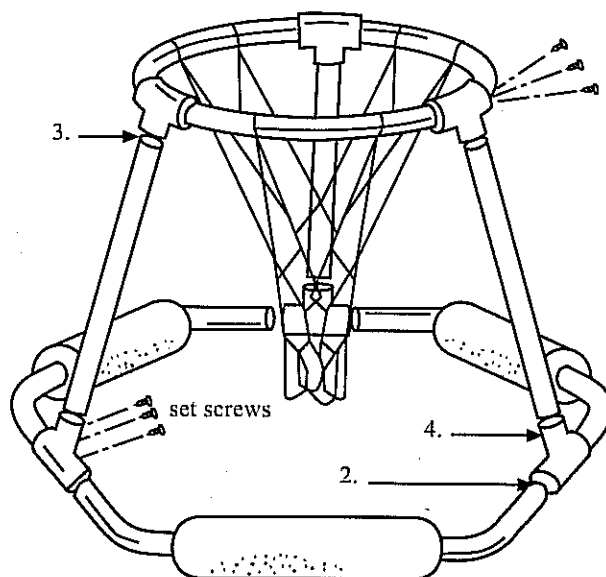

INSTRUCTIONS FOR INFLATING BALL

The game ball may be inflated with a small hand pump or bicycle pump.

BALL INFLATION HINTS

Hand or bicycle pump-For easy inflation use a standard ball pin that attaches to the pump nozzle. Insert the ball.

Inflating needle into the hole in the ball.

Inflate to desired size, being careful not to over-inflate. (maximum 8" diameter)

CAUTION: DO NOT OVER INFLATE

CONTENTS

- 1 top hoop with tee couplings and net.
- 3 bottom hoop sections with floats.
- 3 tee uprights.
- 3 tee couplings.
- 18 pcs screws.
- 1 ball with needle. (6" DIA)

