
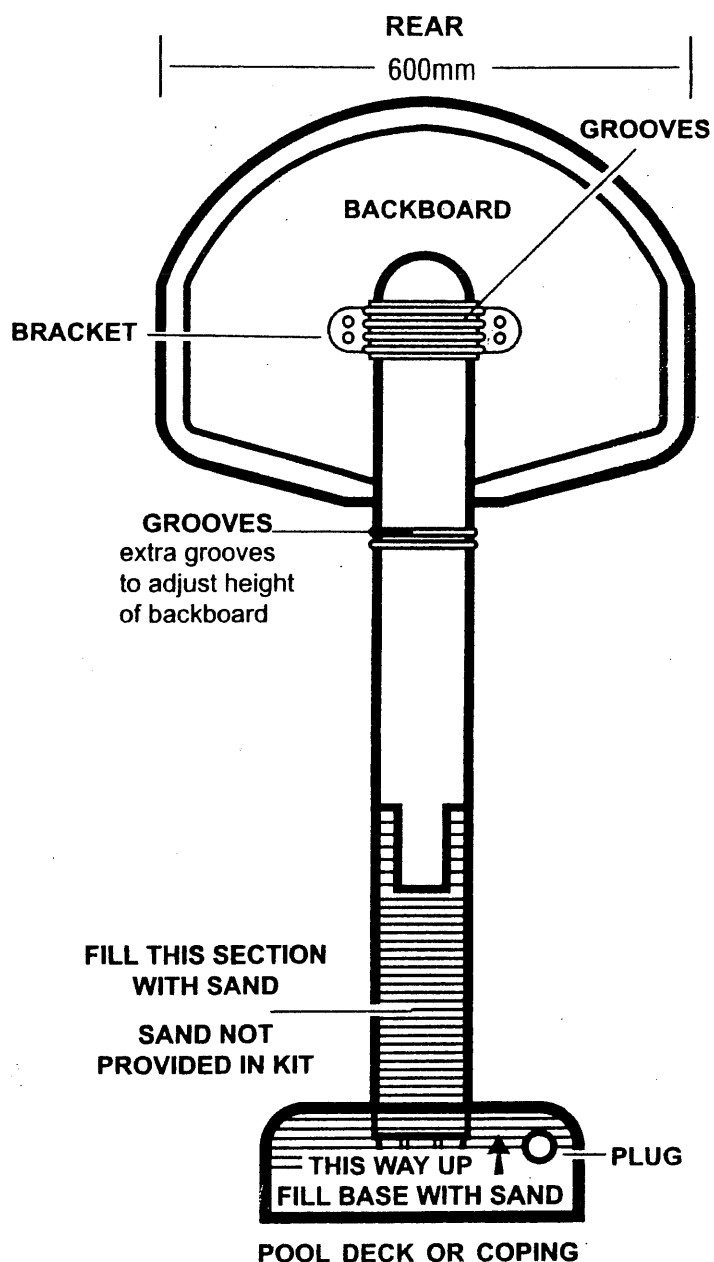


POOLSIDE BASKETBALL ASSEMBLY INSTRUCTIONS

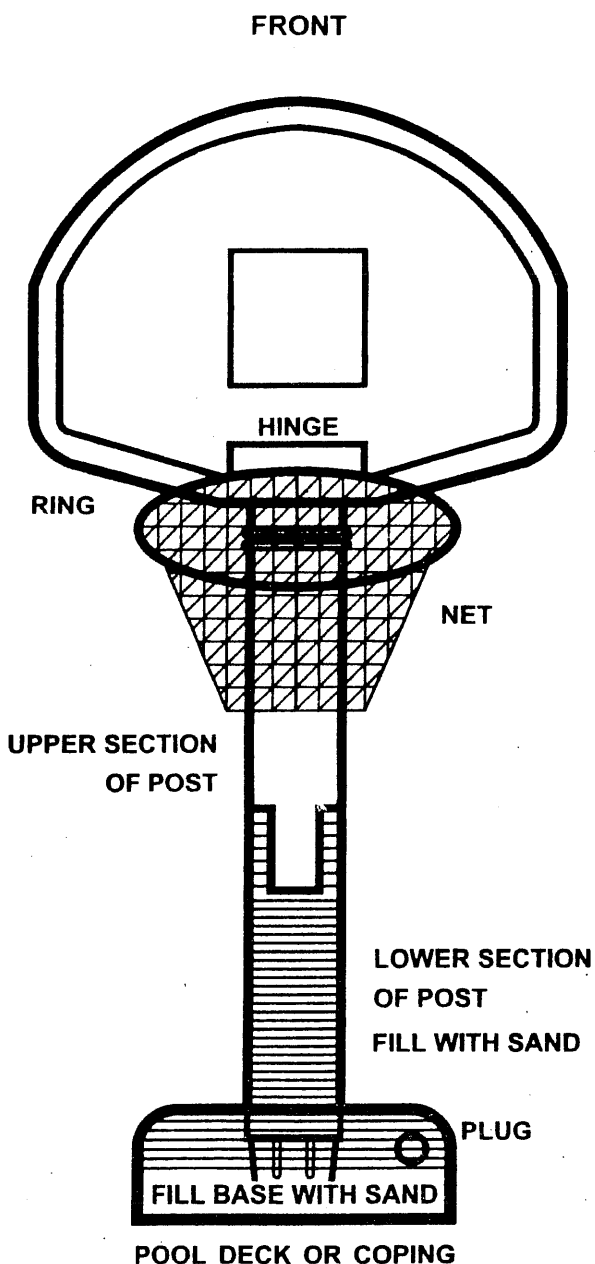

BACKBOARD/RING ASSEMBLY

1. Position bracket over grooved part of post (note : there are both vertical and horizontal grooves) and attach to backboard using nuts and bolts provided.
2. Note there are two sets of grooves on the post so height of backboard can be set at maximum [top grooves], or lower height depending on degree of stability desired, or skill/age of players.
3. Net ring clips onto backboard with attachment lugs and clip-hinge slotting into apertures provided. Bottom lugs go in first, then top clip-hinge is clicked into position using an upward pivot motion. Apparatus is designed so that excessive force [i.e. "slam-dunking"] will dislodge ring, rather than damage hinge.